

Warranty Registration

Hookup of REDGUM Phono Preamp

Connect a high-quality Twin RCA lead from the 2 sockets on the front shown as output to any high level input of your amplifier. Connect the RCA leads from your turntable to the sockets shown as Input. Depending on the earthing system used in your turntable you may need to attach the thin (optional) earth wire to the Gnd terminal between the Input sockets.

A 9V DC power adapter (not supplied) is required to connect power to the preamp. Any basic electronic/ electrical store should have such a unit in stock. The current required is less than 100ma. and the connector type is 2.1mm (.085 inch)

A press button switch on the front applies power to the electronics for operation. No warmup time is required however the general belief is that audio improves with use, so feel free to leave the preamp running at all times - the total power drain is less than 5 watts.

Complete for Warranty Registration :

Name _____

Address _____

City _____ Zip code _____

Country _____ Date of purchase _____

Place of purchase _____

Model No. _____


Serial No. (if any) _____

Fax this page to the REDGUM Audio factory at
+613 9897 1399

or Email details (incl. S.N.) to
<warranty@redgumaudio.com>



redgumaudio.com
warranty@redgumaudio.com

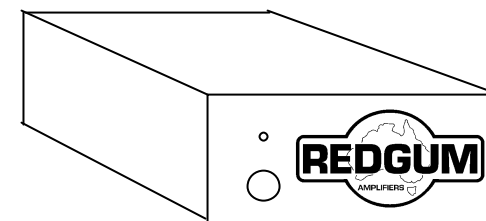

Operating Instructions For RGPH2 Phono Pre-amp

CE **Made in Australia**  N1450
By

REDGUM Audio Pty Ltd
 Factory 3 - 25 Clarice Road
 Box Hill South 3128 Australia
 ABN 45 093 132 515